LC3030

REV1.0-Revised DEC 2007

High Efficiency ,Low Noise PFM Step-up DC/DC Converter

DESCRIPTION


LC3030 series are CMOS-based PFM stepup DC-DC Converter. The converter can start up by supply voltage as low as 0.8V, and capable of delivering maximum 200mA output current at 3.3V output with 1.8V input Voltage. Quiescent current drawn from power source is as low as 5.5uA. All of these features make LC3030 series be suitable for the portable devices, which are supplied by a single battery to four-cell batteries.

To reduce the noise caused by the switch regulator, LC3030 is well considerated in circuit design and manufacture. So that the interferer to other circuits by the device is reduced greatly.

LC3030 integrates stable reference circuits and trimming technology, so it can afford high precision and low temperature-drift coefficient of the output voltage.

LC3030 is available in SOT-89-3,SOT-23-3 and SOT-23-5 packages which is PB free. And in 5-pin packages, such as SOT-23-5, the device can be switch on or off easily by CE pin, to minimize the standby supply current.

TYPICAL APPLICATION




FEATURES

- Deliver 200mA at 3.3V Output voltage with 1.8V input Voltage
- Low start-up voltage (when the output current is 1mA)-----0.8V
- Output voltage can be adjusted from 2.5V~6.0V (In 0.1V step)
- Output voltage accuracy -----±2%
- Low temperature-drift coefficient of the output voltage-----±100ppm/°C
- Only three external components are necessary: An inductor, a Schottky diode and an output filter capacitor
- High power conversion efficiency-----85%
- Low quiescent current drawn from power source-----<5.5uA

APPLICATIONS

- Power Source for PDA,DSC,MP3 Player, Electronic toy and wireless mouse
- Power Source for a Single or Dual-cell Battery-Powered Equipments
- Power Source for LED

ELECTRICAL CHARACTERISTICS



ORDERING INFORMATION

LC3030 1 2 3 4

	D ' '
Code	Description
1	Temperature&Rohs:
	C:-40~85°C ,Pb Free Rohs Std.
	Package type:
	B3:SOT-23-3
2	B5:SOT-23-5
	C3:SOT-89-3
	H:TO-92
	Packing type:
3	TR:Tape&Reel (Standard)
	BG:Bag(TO-92)
4	Output voltage:
	e.g. 25=2.5V
	33=3.3V
	60=6.0V

ABSOLUTE MAXIMUM RATING

Parameter		Value	
Input Voltage Range		-0.3V-12V	
Input Voltage		-0.3V-(Vout+0.3)	
CE Pin Voltage		-0.3V-(Vout+0.3)	
Lx Pin Output Current		0.7A	
Operating Junction		125°C	
Temperature(Tj)			
Ambient		-40°C -85°C	
Temperature(Ta)			
Power	SOT-23-3	250mW	
Dissipation	SOT-23-5	250mW	
	SOT-89-3	500mW	
	TO-92	500mW	
Storage		-40°C -150°C	
Temperature(Ts)			
Lead Temperature &		260°C,10S	
Time			

Note:

Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

PIN CONFIGURATION

Product Classification		LC3030CB3TR□□		
Marking		sот23-3 3 Н		
30XX	30:Product Code XX:Output Voltage	30XX H H 2	1 Vss 2 Vout 3 Lx(Ext)	
Product Classific		LC3030CB5TR		
Marking		SOT23-5 5 4	1 CE	
30XX	30:Product Code XX:Output	30XX H H H 1 2 3	2 Vout 3 NC 4 Vss 5 Lx(Ext)	
Product Classific	Voltage	LC3030CC3TR		
Marking				
LAXX YYBZZ	LA:Product Code XX:Output Voltage YY:LOT NO. B:FAB Code ZZ:Data Code	LAXX YYBZZ H H H 1 2 3	1 Vss 2 Vout 3 Lx(Ext)	
Product		LC3030CHBG		
Classific	ation arking			
LAXX YYBZZ	LA:Product Code XX:Output Voltage YY:LOT NO. B:FAB Code ZZ:Data Code	TO-92 LAXX YYBZZ 1 2 3	1 Vss 2 Vout 3 Lx(Ext)	
CE	Chip Enable	e(Active high)		
Vss	Ground			
Vout	Output, Power supply for internal			
Lx	Switching Pin			
NC	No Connec	tion		

RECOMMENDED WORK CONDITIONS

Item	Min	Recommended	Max.	Unit
Input Voltage Range	0.8		Vout	V
Inductor	10	27	100	μH
Input Capacitor	0	≥10		μF
Output Capacitor	47	100	220	μF
Ambient Temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS

SYMBOL ITEM TEST CONDITIONS INCLUDITIONS Min Typ Max 2.45 2.5 2.55 2.646 2.7 2.754	
2 646 2 7 2 754	
2.010 2.7 2.704	
2.94 3.0 3.06	V
Vout Output Voltage 3.234 3.3 3.366	
3.528 3.6 3.672	
3.92 4.0 4.08	
4.9 5.0 5.1	
5.88 6.0 6.12	
Vin Input Voltage 12 V	′
line I lout=0mA,	uA
lin Input Current Vin=Vout*0.6	
lout=1mA,	V
Vstart Start-up voltage V in: $0 \rightarrow 2V$ 0.8 0.9 V	
lout=1mA.	V
Vhold Hold-on voltage $\begin{vmatrix} 10012 & 1117 & 1 \\ Vin: & 2 \rightarrow 0 & 1 \end{vmatrix}$ 0.6 0.7	
Quiescent Without external	
I CUTTON GROWN	٨
from power =Vout×1.05	uA
source	
Rswon Switch ON 0.4 0.5 C)
Resistance	4
ILXleak	4
current	
CE "H"	,
VCEH threshold V_{CE} : $0\rightarrow 2V$ 0.6 0.9 V_{CE}	'
voltage CE "H"	
	,
VCEL threshold V_{CE} : $2\rightarrow 0V$ 0.3 0.6 V	'
voltage Oscillator LX on "L" side	
Fosc frequency Vout=Vout*0.96 300 350 400 Kh	ìΖ
Oscillator duty	
Maxdty Cocinator duty Cycle On (Vlx "L") side 70 75 80 %	ó
η Efficiency 85	<u> </u>


NOTE:

1. Diode: Schottky type, such as: 1N5817,1N5819,1N5822

2. Inductor: $27uH(R<0.5\Omega)$

3. Capacitor: 100uF(Tantalum type)

BLOCK DIAGRAM

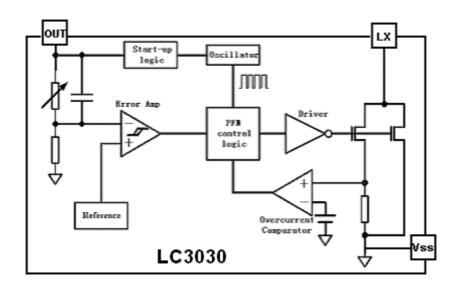

DETAILED DESCRIPTION

The LC3030 series are boost structure, voltage-type Pulse-Frequency Modulation (PFM) step-up DC-DC converter. Only three external components are necessary: an inductor, an output filter capacitor and a schottky diode. And the converter's low noise and low ripple output voltage can be adjusted from 2.5V to 5.0V, 0.1V step. By using the depletion technics, the quiescent current drawn from power source is lower than 7uA. The high efficiency device consists of resistors for output voltage detection and trimming, a start-up voltage circuit, an oscillator, a reference circuit, a PFM control circuit, a switch protection circuit and a driver transistor.

The PFM control circuit is the core of the LC3030 IC. This block controls power switch on duty cycle to stabilize output voltage by calculating results of other blocks which sense input voltage, output voltage, output current and load conditions. In PFM modulation system, the frequency and pulse

width is fixed. The duty cycle is adjusted by skipping pulses, so that switch on-time is changed based on the conditions such as input voltage, output current and load. The oscillate block inside LC3030 provides fixed frequency and pulse width wave.

The reference circuit provides stable reference voltage to output stable output voltage. Because internal trimming technology is used, The chip output change less than ±2%. At the same time, the problem of temperature-drift coefficient of output voltage is considered in design, temperature-drift coefficient of output voltage is less than 100ppm/℃.

High-gain differential error amplifier guarantees stable output voltage at difference input voltage and load. In order to reduce ripple and noise, the error amplifier is designed with high band-with.

Though at very low load condition, the quiescent current of chip do effect efficiency certainly. The four main energy loss of Boost

structure DC-DC converter in full load are the ESR of inductor, the voltage of Schottky diode, on resistor of internal N-channel MOSFET and its driver. In order to improve the efficiency, LC3030 integrates low onresistor N-channel MOSFET and well design driver circuits. The switch energy loss is limited at very low level.

SELECTION THE EXTERNAL COMPONENTS

Thus it can be seen, the inductor and schottky diode affect the conversion efficiency greatly. The inductor and the capacitor also have great influence on the output voltage ripple of the converter. So it is necessary to choose a suitable inductor, a capacitor and a right schottky diode, to obtain high efficiency, low ripple and low noise.

Before discussion, we define

$$D \equiv \frac{Vout - Vin}{Vout}.$$

INDUCTOR SELECTION

Above all, we should define the minimum value of the inductor that can ensure the boost DC-DC to operate in the continuous current-mode condition.

$$L\min \geq \frac{D(1-D)^2 R_L}{2f}$$

The above expression is got under conditions of continuous current mode, neglect Schottky diode's voltage, ESR of both inductor and capacitor. The actual value is greater that it. If inductor's value is less than *Lmin*, the efficiency of DC-DC converter will drop greatly, and the DC-DC circuit will not be stable.

Secondly, consider the ripple of the output voltage,

$$\Delta I = \frac{D \bullet Vin}{Lf}$$

$$\operatorname{Im} ax = \frac{Vin}{(1-D)^2 R_L} + \frac{DVin}{2Lf}$$

If inductor value is too small, the current ripple through it will be great. Then the

current through diode and power switch will be great. Because the power switch on chip is not ideal switch, the energy of switch will improve. The efficiency will fall.

Thirdly, in general, smaller inductor values supply more output current while larger values start up with lower input voltage and acquire high efficiency.

An inductor value of 3uH to 1mH works well in most applications. If DC-DC converter delivers large output current (for example: output current is great than 50mA), large inductor value is recommended in order to improve efficiency. If DC-DC must output very large current at low input supply voltage, small inductor value is recommended.

The ESR of inductor will effect efficiency greatly. Suppose ESR value of inductor is r_L , R_{load} is load resistor, then the energy can be calculated by following expression :

$$\Delta \eta \approx \frac{r_L}{R_{load} (1 - D)^2}$$

For example: input 1.5V, output is 3.0V, R_{load} =20 Ω , r_L =0.5 Ω , The energy loss is 10%. Consider all above, inductor value of 47uH, ESR<0.5 Ω is recommended in most applications. Large value is recommended in high efficiency applications and smaller value is recommended

CAPACITOR SELECTION

Ignore ESR of capacitor, the ripple of output voltage is:

$$r = \frac{\Delta Vout}{Vout} = \frac{D}{R_{load}Cf}$$

So large value capacitor is needed to reduce ripple. But too large capacitor value will slow down system reaction and cost will improve. So 100uF capacitor is recommended. Larger capacitor value will be used in large output current system. If output current is small (<10mA), small value is needed.

Consider ESR of capacitor, ripple will increase:

$$r' = r + \frac{\operatorname{Im} ax \bullet R_{ESR}}{Vout}$$

When current is large, ripple caused by ESR will be main factor. It may be greater than 100mV. The ESR will affects efficiency and increase energy loss. So low-ESR capacitor (for example: tantalum capacitor) is recommend or connect two or more filter capacitors in parallel.

DIODE SELECTION


Rectifier diode will affects efficiency greatly, Though a common diode (such as 1N4148) will work well for light load, it will reduce about 5%~10% efficiency for heavy load, For optimum performance, a Schottky diode (such as 1N5817、1N5819、1N5822) is recommended.

INPUT CAPACTITOR


If supply voltage is stable, the DC-DC circuit can output low ripple, low noise and stable voltage without input capacitor. If voltage source is far away from DC-DC circuit, input capacitor value greater than 10uF is recommended.

TEST CIRCUITS


Output voltage test circuit (I_{load}=1mA)




Start-up voltage test circuit (I_{load}=1mA)



Hold-on voltage test circuit (I_{load}=1mA)




Quiescent current test circuit



Note: Vout=Vout*1.05, R=1K Ω , C=0.1uF.


Oscillator frequency and duty cycle test circuit





Note: Vin=Vout*0.95, R=1K Ω .


TYPICAL PERFORMANCE CHARACTERISTICS


Recommended operating conditions: Cin=47uF, Cout=47uF, Topt=25°C. unless otherwise noted)


























PACKAGE LINE

